


FOOTING SCHEDULE

MARK	SIZE			QUANTITY	REINFORCING
	WIDTH	LENGTH	THICKNESS		
F3.5	3'-6"	3'-6"	1'-0"	23	2x5#4 4A19 BOT. EW
F4.0	4'-0"	4'-0"	1'-2"	5	2x7#4 3A08 BOT. EW
F4.5	4'-6"	4'-6"	1'-4"	4	2x8#4 4A02 BOT. EW
F5.0	5'-0"	5'-0"	1'-4"	3	2x8#6 4A08 BOT. EW
F5.5	5'-6"	5'-6"	1'-6"	1	2x8#6 5A02 BOT. EW
F6.0	6'-0"	6'-0"	1'-8"	8	2x7#6 5A08 BOT. EW
F7.0	7'-0"	7'-0"	2'-0"	1	2x8#6 6A08 BOT. EW
F8.0	8'-0"	8'-0"	2'-2"	1	2x11#6 7A08 BOT. EW
F8.0x16.0	8'-0"	16'-0"	2'-2"	2	2x11#6 15A08 BOT. LW 2x11#6 7A08 BOT. SW

MARK	SIZE	B.O.F.		T.O.P.		REINFORCING	GRID LOCATION
		1	2	1	2		
P1A.0	30"x30"	183'-0"	183'-9"	193'-9"	193'-9"	8#8 9-02 VERT. 8#8 8A46 DWLS. 11#4 4A47 @12" TIES 2x11#4 4A49 @12" CROSS TIES 2#4 4A44 ADDL TIES 2x2#4 4A48 ADDL CROSS TIES 3x#4 4A47 ADDL AT PIER POCKET 5#4 4A49 @12" U-BAR AT PIER POCKET 4#4 4A47 ADDL AT PIER POCKET (6,9) 4#4 7A06 ADDL AT PIER POCKET	A, 14 A, 13 A, 11 B, 6,9
P1B.0	30"x30"	183'-0"	183'-9"	194'-11"	194'-11"	8#8 11-10 VERT. 8#8 8A46 DWLS. 13#4 4A47 @12" TIES 2x13#4 4A49 @12" CROSS TIES 2#4 4A44 ADDL TIES 2x2#4 4A48 ADDL CROSS TIES 4#4 5A05 ADDL AT PIER POCKET 3#4 4A49 @12" U-BAR AT PIER POCKET	B, 10
P1C.0	30"x30"	183'-0"	184'-0"	194'-0"	194'-0"	8#8 10-11 VERT. 8#8 8A46 DWLS. 11#4 4A47 @12" TIES 2x11#4 4A49 @12" CROSS TIES 2#4 4A44 ADDL TIES 2x2#4 4A48 ADDL CROSS TIES 4#4 4A49 @12" U-BAR AT PIER POCKET 4#4 5A05 ADDL AT PIER POCKET 6#4 4A49 @12" U-BAR AT PIER POCKET	B, 9,1 C, 1
P1D.0	30"x30"	183'-0"	185'-1"	195'-1"	195'-1"	8#8 13-06 VERT. 8#8 8A46 DWLS. 15#4 4A47 @12" TIES 2x15#4 4A49 @12" CROSS TIES 2#4 4A44 ADDL TIES 2x2#4 4A48 ADDL CROSS TIES	E, 5, 1
P1E.0	30"x30"	181'-0"	185'-6"	195'-6"	195'-6"	8#8 8A50 VERTS. 5#4 4A47 @12" TIES 2x5#4 4A49 @12" CROSS TIES 2#4 4A44 ADDL TIES 2x2#4 4A48 ADDL CROSS TIES	H, 14 J, 10 R, 9 H, 13 K, 10 R, 8 H, 11 R, 12 R, 2 H, 10 R, 10
P2.0	18"x18"	183'-0"	193'-9"	193'-9"	193'-9"	8#8 9-02 VERT. 8#8 8A46 DWLS. 11#4 4A51 @12" TIES 2x11#4 4A52 @12" CROSS TIES 2#4 4A51 ADDL TIES 2x2#4 4A53 ADDL CROSS TIES 5#4 4A53 @12" U-BAR AT PIER POCKET	A, 10

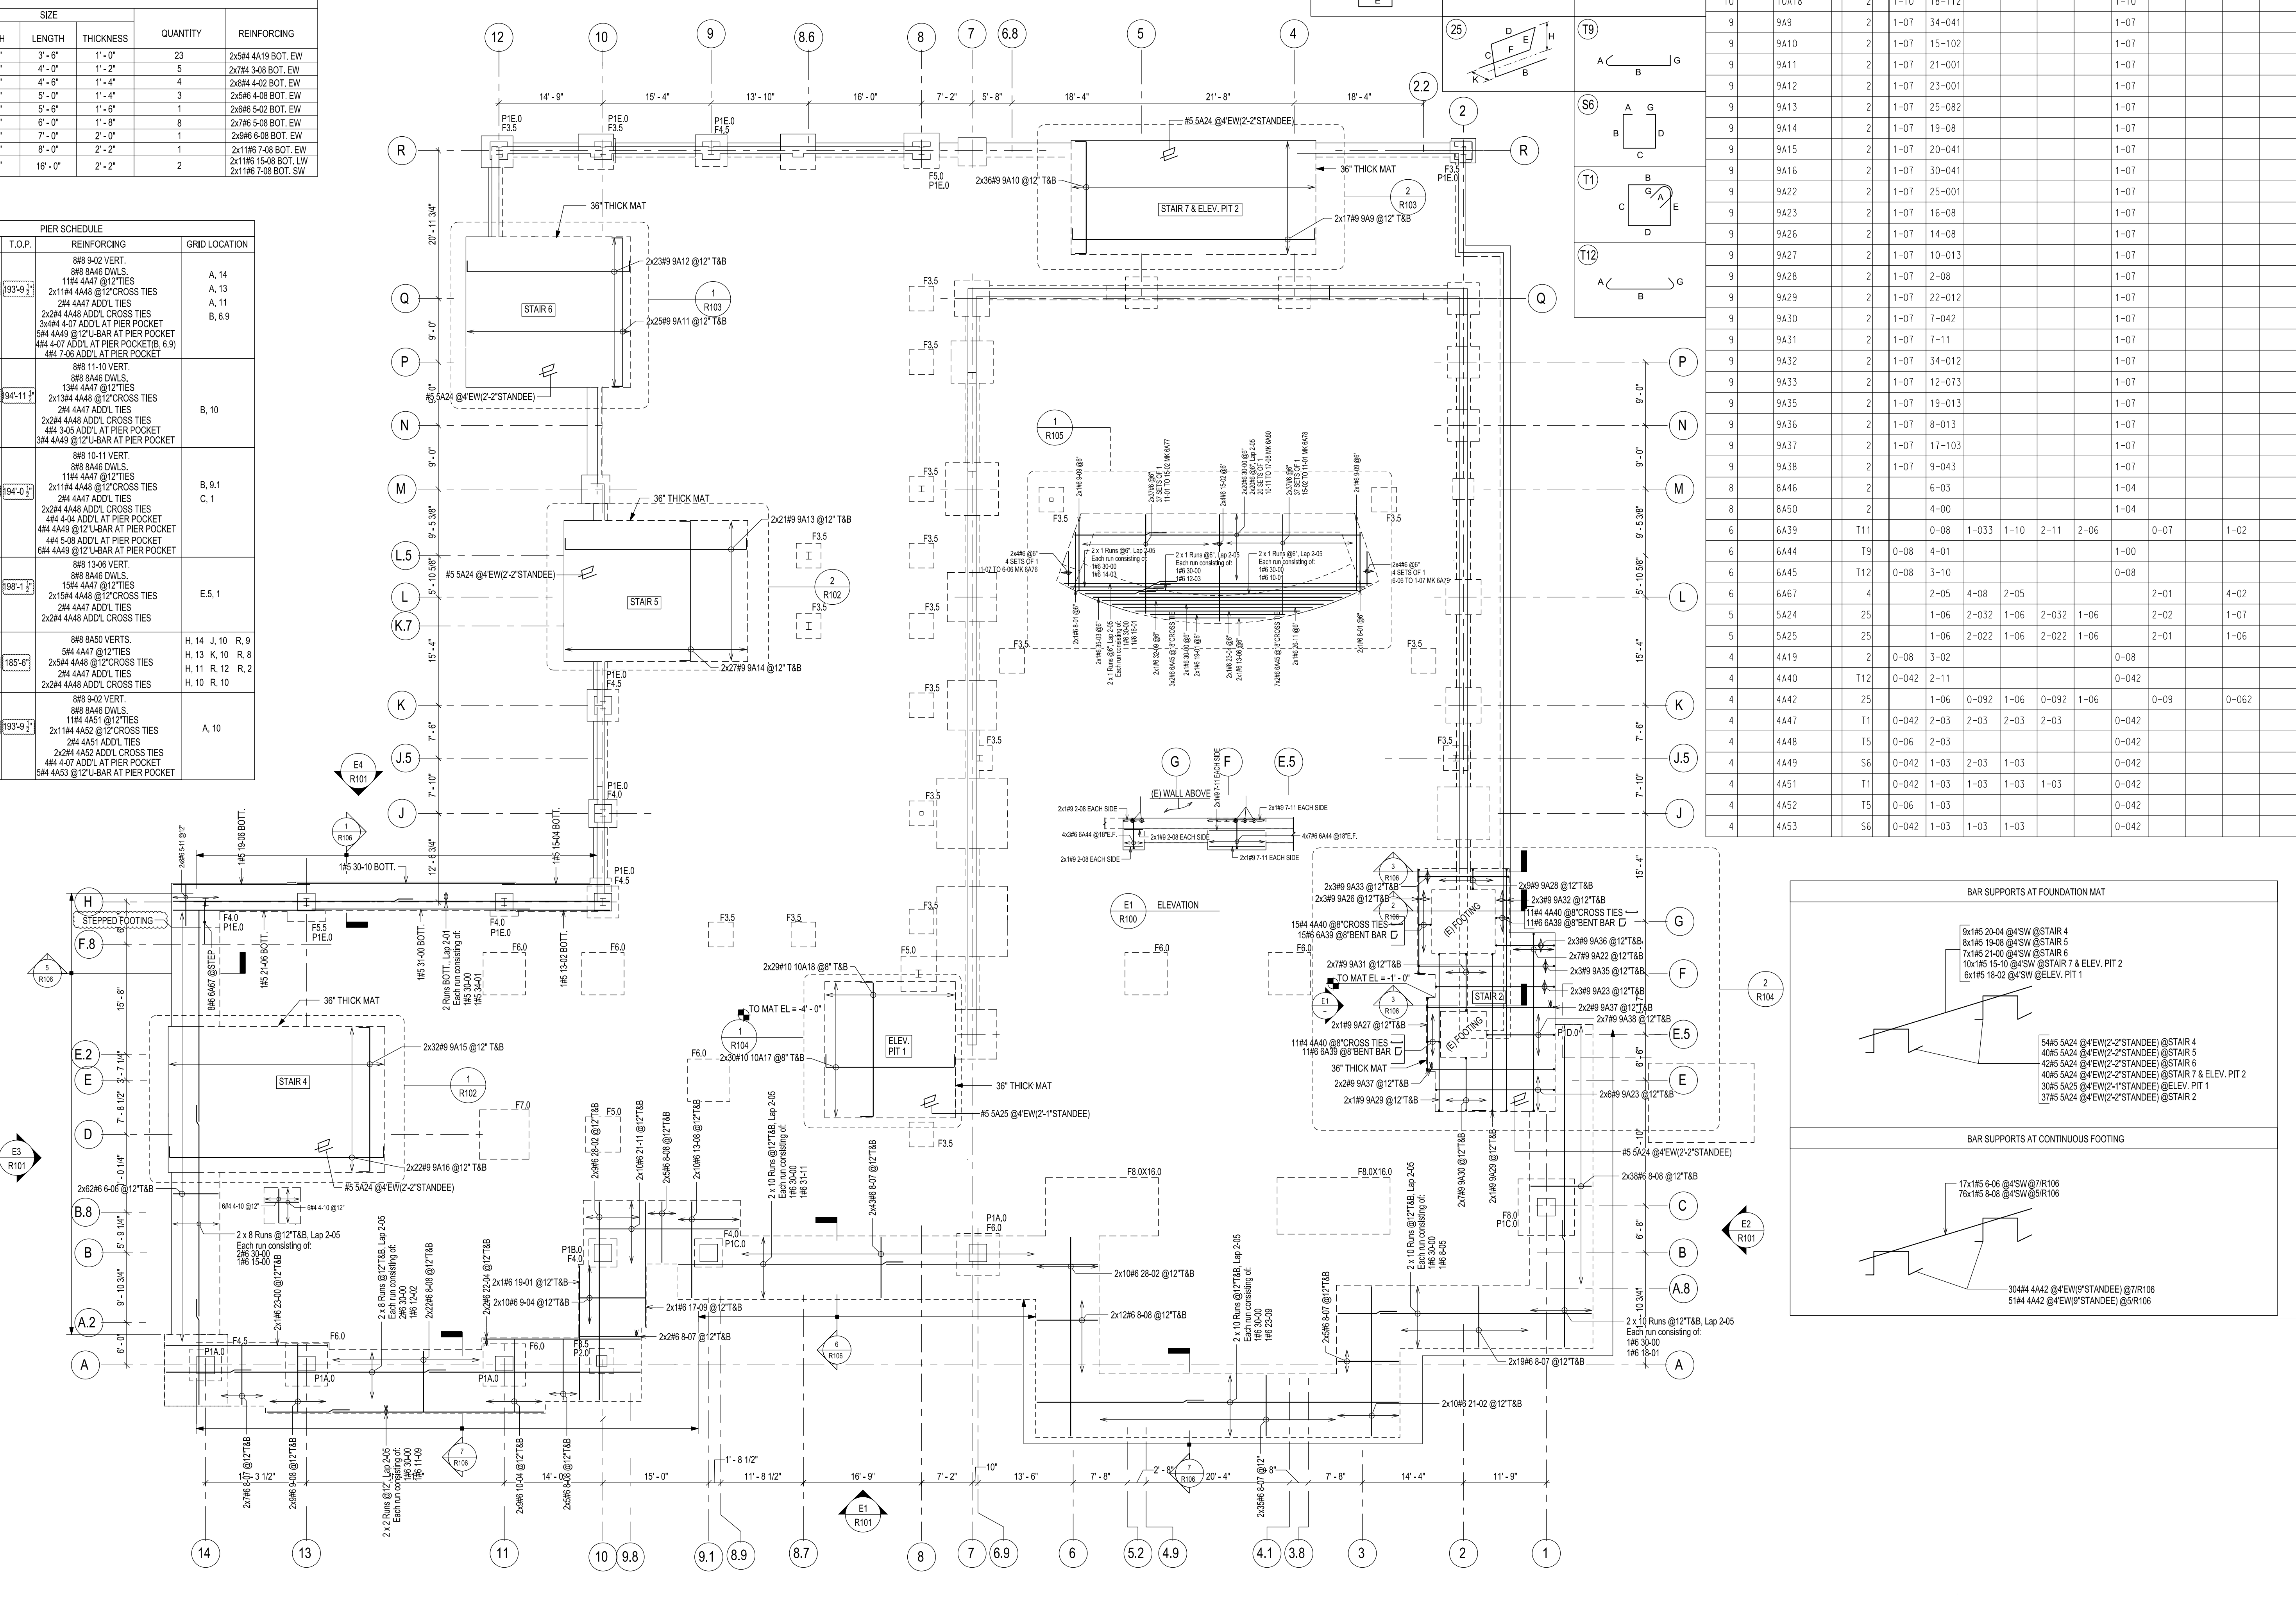

SI	EP	BAR MARK	V	BND TYP	CD	A	B	C	D	E	F/R	ON	G	H	J	K	O
10		10A17			2	1-10	18-021										1-10
10		10A18			2	1-10	18-112										1-10
9		9A9			2	1-07	34-041										1-07
9		9A10			2	1-07	15-102										1-07
9		9A11			2	1-07	21-001										1-07
9		9A12			2	1-07	23-001										1-07
9		9A13			2	1-07	25-082										1-07
9		9A14			2	1-07	19-08										1-07
9		9A15			2	1-07	20-041										1-07
9		9A16			2	1-07	30-041										1-07
9		9A22			2	1-07	25-001										1-07
9		9A23			2	1-07	16-08										1-07
9		9A26			2	1-07	14-08										1-07
9		9A28			2	1-07	2-08										1-07
9		9A29			2	1-07	22-012										1-07
9		9A30			2	1-07	7-042										1-07
9		9A31			2	1-07	7-11										1-07
9		9A32			2	1-07	34-012										1-07
9		9A33			2	1-07	12-073										1-07
9		9A35			2	1-07	19-013										1-07
9		9A36			2	1-07	8-013										1-07
9		9A37			2	1-07	17-103										1-07
9		9A38			2	1-07	9-043										1-07
8		8A46			2		6-03										1-04
8		8A50			2		4-00										1-04
6		6A39	T11			0-08	1-033	1-10	2-11	2-06			0-07			1-02	
6		6A44	T9			0-08	4-01										1-00
6		6A45	T12			0-08	3-10										0-08
6		6A67	4			2-05	4-08	2-05							2-01		4-02
5		5A24	25			1-06	2-032	1-06	2-032	1-06					2-02		1-07
5		5A25	25			1-06	2-022	1-06	2-022	1-06					2-01		1-06
4		4A19	2			0-08	3-02										0-08
4		4A40	T12			0-042	2-11										0-042
4		4A42	25			1-06	0-092	1-06	0-092	1-06				0-09			0-062
4		4A47	T1			0-042	2-03	2-03	2-03	2-03							0-042
4		4A48	T5			0-06	2-03										0-042
4		4A49	56			0-042	1-03	2-03	1-03								0-042
4		4A51	T1			0-042	1-03	1-03	1-03	1-03							0-042
4		4A52	T5			0-06	1-03										0-042
4		4A53	56			0-042	1-03	1-03	1-03								0-042

